

Range Specifications

	Serie 3					Serie 3 HD	
	Mounted rigid		Trailed folded			Mounted rigid	
Model	3,00 m	3,50 m	4,00 m	4,50 m	6,00 m	3,00 m	4,00 m
Power req. (HP)	120-160	145-195	170-220	180-240	250-350	190-300	250-400
Blades	TCS 550					TCS 650	
Number of discs	24	28	32	36+1	48+1	20	28
Weight with shear bolt security & Cage roller	2 152	2 435	2 738	7 765	9 420	2 820	3 615



535 rue Pierre Levasseur - CS 60263
44158 ANCENIS - FRANCE

T. +33 (0) 2 51 14 14 40
F. + 33 (0) 2 40 96 32 36

www.agrisem.com
agrisem@agrisem.com



Your Dealer:



MAXIMULCH® Serie 3

MAXIMULCH® Serie 3

MAXIMULCH® mounted

MAXIMULCH® semi-mounted





The MAXIMULCH® is a combined machine which offers the fonctions of a soil loosener and of stubble breaker.

This machine allows to do two operations in one pass.


It's concentrate of AGRISEM technology assembled on one machine.

This combinaison of disc and blades allows to cut and incorporate the residues, tines, mixed and decompact the soil.

MAXIMULCH® works to incorporate residues, manure, destruction of crop regrowth preparing seed bed.

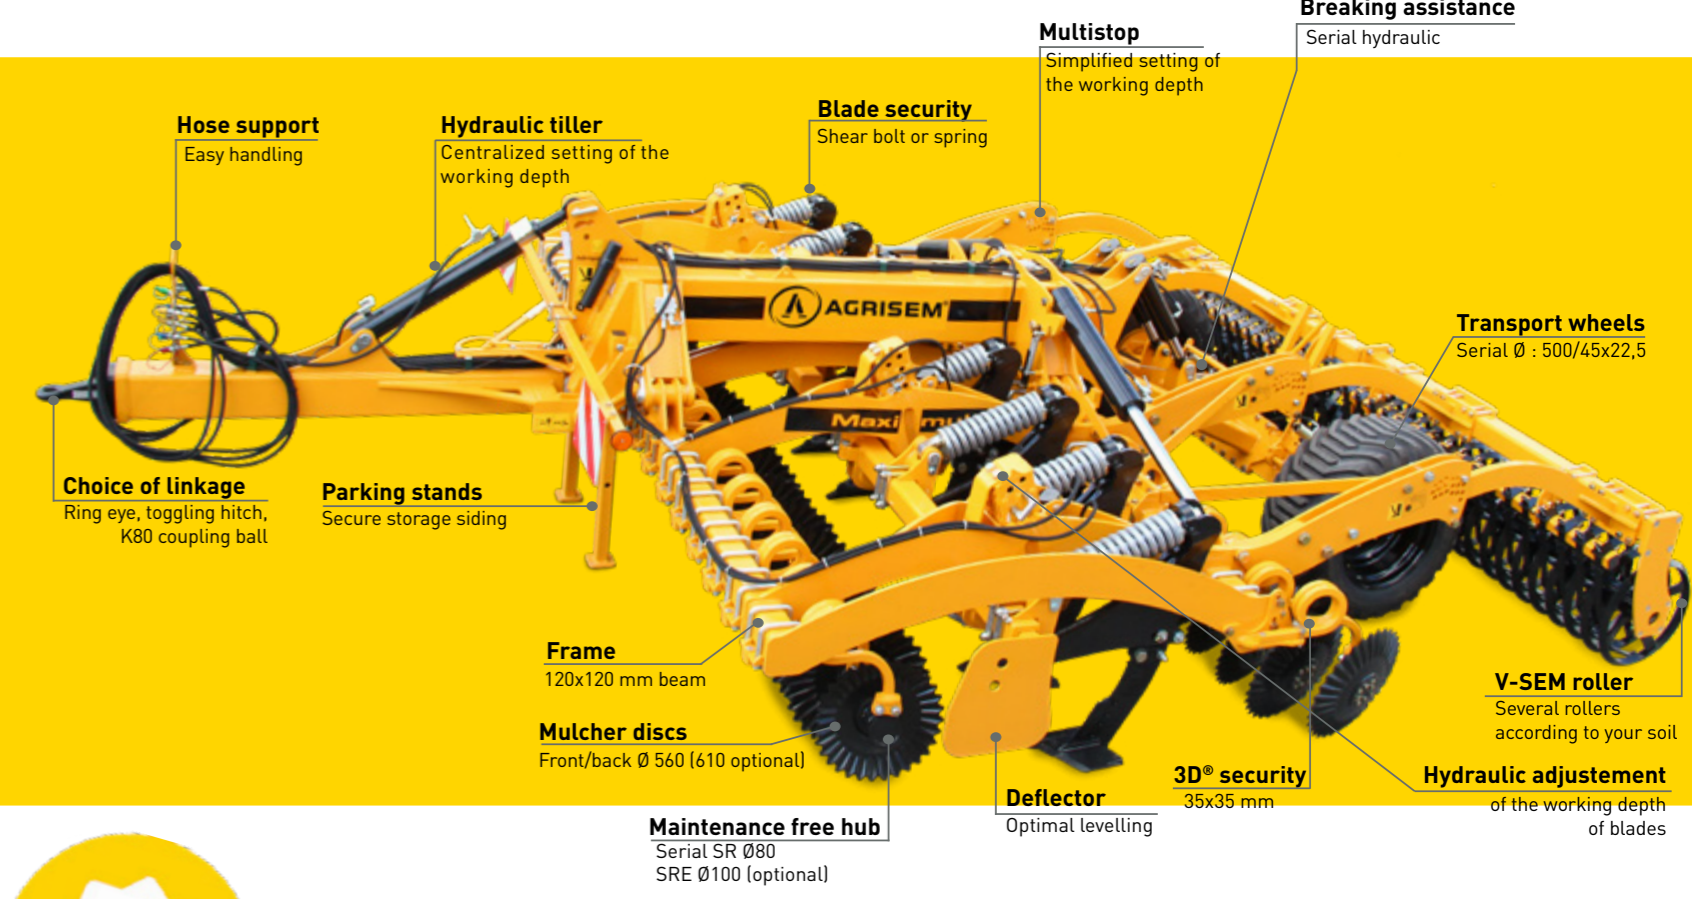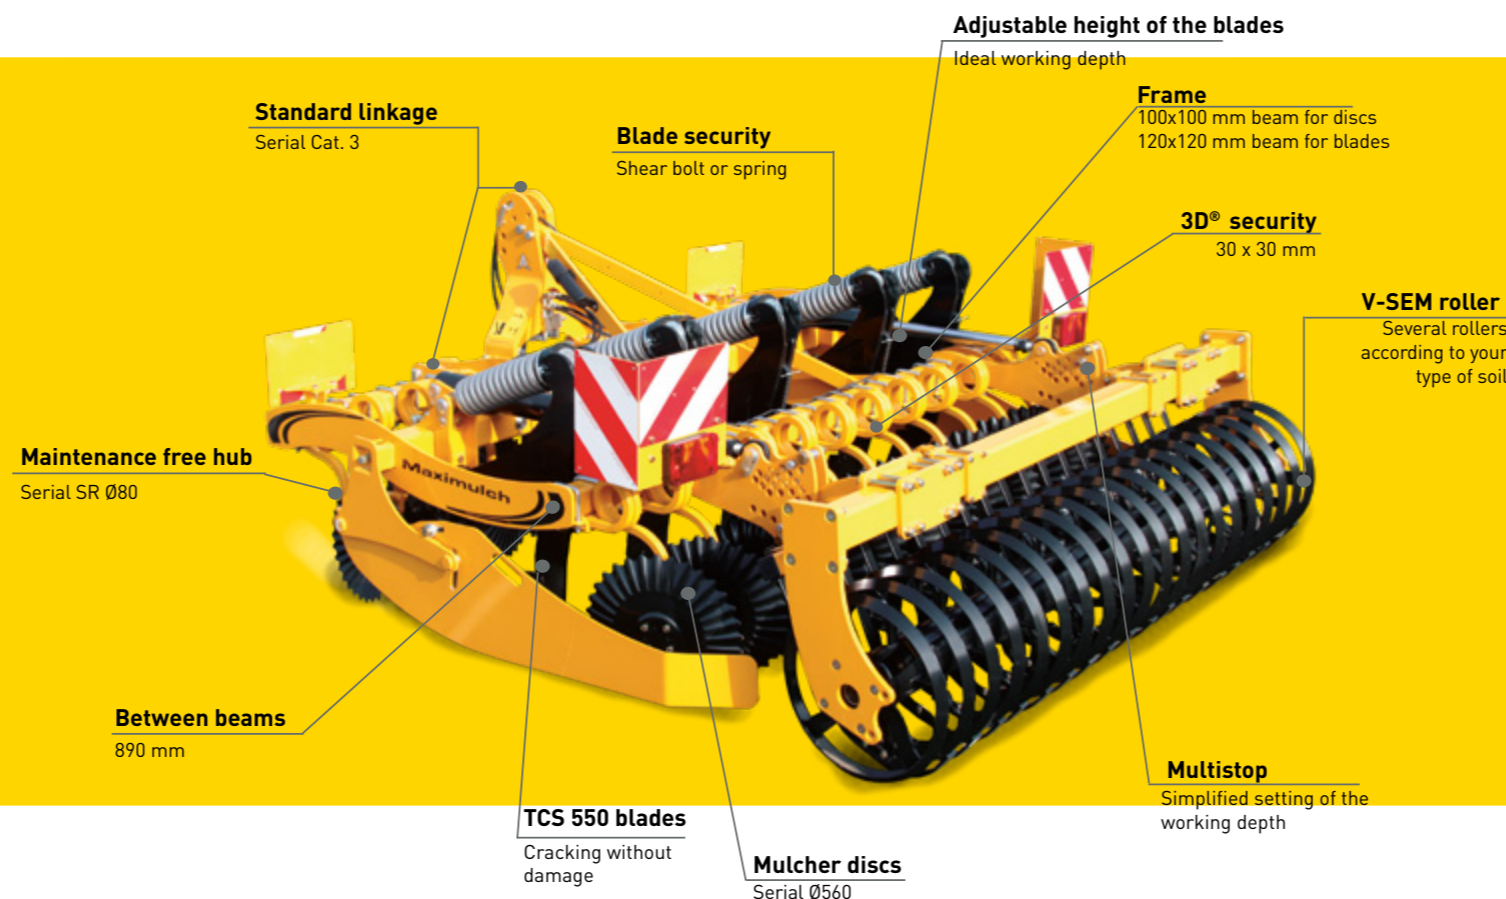

NEW CARBI-PROTECT ploughshares

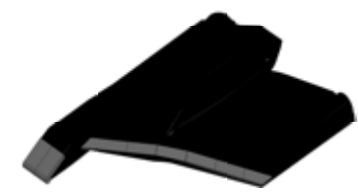

- » 5 to 10 time more longevity
- » Regular working quality
- » Easy to replace




- ### HD Version
- » More spacing between rows and between discs for heavy soils or with quantity of residues
 - » TCS 650 blades
 - » Reinforced frame for high power
 - » Possibility to fix the blades on the third row



Rack system

Wide adjustment range of the working depth


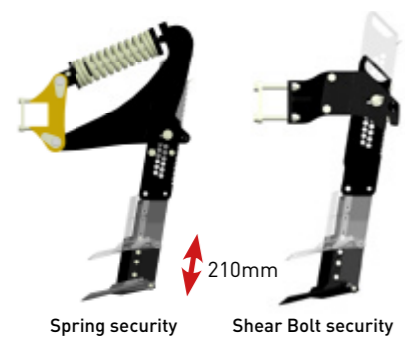


- » Allows to adapt the working depth of the blades depending on soil type
- » Rapid setting

3D security with percussion effect

Positive pan and working angles

Patented

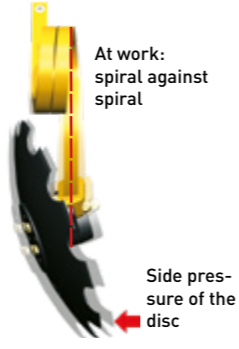

- » Quality of work
- » Energy saving
- » No maintenance

New mulcher disc

Grooved profile on all its working length



- » Maximum mincing of crop
- » Self-cleaning in wet conditions
- » Unchanged quality with the wear of the disc

Maintenance free hub

The biggest hubs on the market
SR = 80 mm / SRE = 100 mm
Rotation to copy row of balls with contact obliques
Double joint Cassette




- » Maintenance free
- » Dustproof hubs = reliability
- » Possibility of working at high speed

Agronomic cracking


Known by all the agronomists in the world

PATENTED

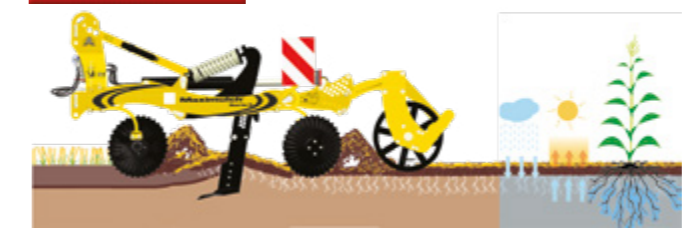

- » No disruption of the horizons
- » Verticale cracking by the creation of a wave
- » Facilitates crop growing and capillary rise

Economy

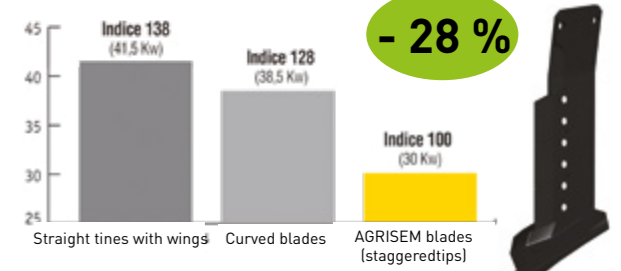

Résultats of official trials by Derval (FR).
Power consumption of a 3m soil loosener working at 30 cm deep.

- » Nearly 30% less power than a traditionnal soil loosener
- » Improved productions