

Range Specifications

	Serie 5				Serie 6		
	Trailed rigid		Trailed folded		Trailed folded		
Model	3,00 m	4,00 m	4,00 m	5,00 m	4,00 m	5,00 m	6,00 m
Power req. (HP)	180-320	240-450	240-450	300-500	200-300	280-380	350-450
Blades/tines	TCS 550 or AGM HD				20x590 or AGM		
Number of blades	7	9	9	11	13	15	19
Number of discs ø610	17	25	25	29	19+2	27+2	29+2
Weight with shear bolt security & Cage roller	5 216	6 222	7 800	8 560	8 275	9 365	10 450



T. +33 (0) 2 51 14 14 40
F. + 33 (0) 2 40 96 32 36

www.agrisem.com
agrisem@agrisem.com



Your Dealer:



MAXIMULCH® Serie 5/6

MAXIMULCH® Serie 5/6

MAXIMULCH® Serie 5

MAXIMULCH® Serie 6




The MAXIMULCH® is a combined machine which offers the fonctions of a stubble breaker and of soil loosener.

This machine allows to do two operations in one pass.




It's concentrate of AGRISEM technology assembled on one machine.

This combinaison of disc and blades allows to cut and incorporate the residues, tines, mixed and decompact the soil.

MAXIMULCH® works to incorporate residues, manure, destruction of crop regrowth preparing seed bed.

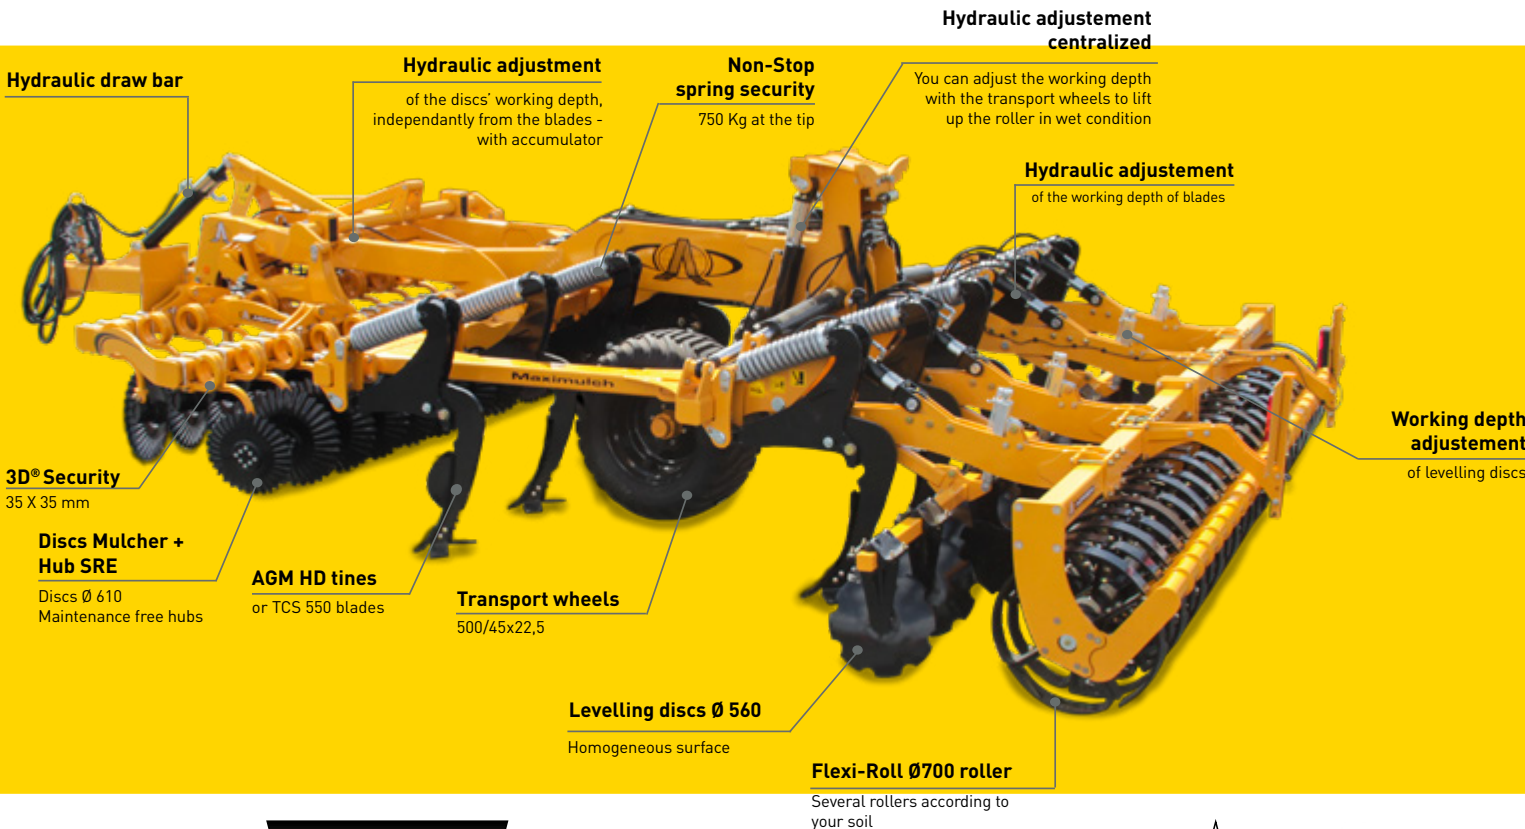

	Space between tines	Working in crop residues	Mixe of residues in surface	Half-deep tillage	Deep loosening
Maximulch serie 5	45 cm	+++	+	++	+++
Maximulch serie 6	30 cm	++	+++	+++	+

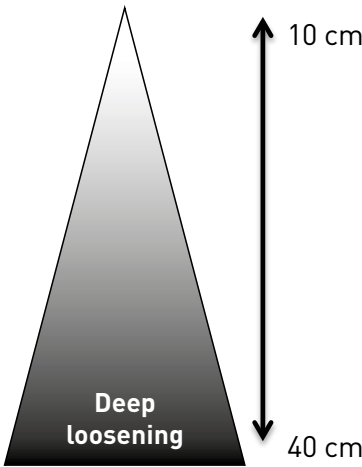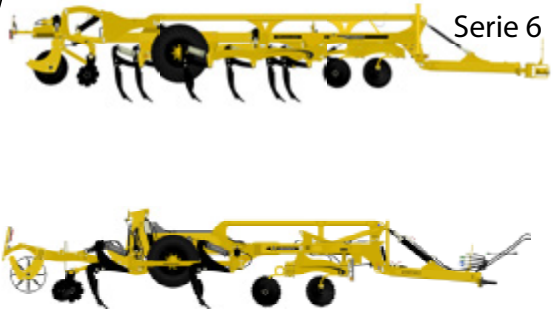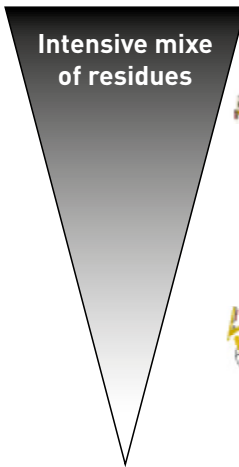

Exclusivity on SERIE 5

TCS 550 blade
PATENTED



- » Loosening by vertical cracking
- » No disturbance of horizons
- » Facilitates crop growing capillary rises

Exclusivity on SERIE 6

Retracted point blade
PATENTED



- » By replacing the tines by blades, it becomes a soil loosener
- » 1 machine for 2 functions
- » Use all year long

AGM tines with stubble-braker shares

Optional

Carbid BETEK® Technology

Share width 80 mm
Carbid wings adaptables

- 5 to 10 times more life expectancy
- Regular quality of the work
- Easy to replace



- » Non-stop spring security with 750kg of pressure at the tip
- » Worp up to 40cm deep
- » Deep cultivation

Levelling-out




- » Perfect state of the surface
- » Improved ground structure
- » Facilitated gestion of the crop

Hight clearance


Serie 5

Under frame clearance : 890mm

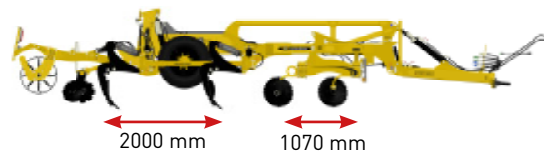

Serie 6

Under frame clearance : 800mm

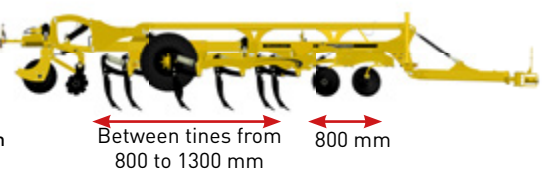


- » Hight space between elements
- » Ensure good throughflow of soil
- » Facilitate work with residues

3D security with percussion effect


Positive pan and working angles

PATENTED




- » Quality of work
- » Energy saving
- » No maintenance

Work with or without wings

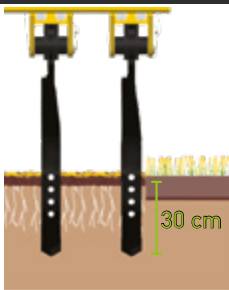

Without the wings: work at 30 cm deep

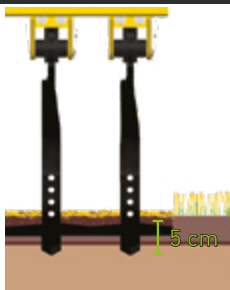

With the wings: work at 5 cm deep

- » Versatility of use
- » Intensive mix of residues (with wings)
- » Deep cultivation (without wings)