

# Range Specifications

	Mounted folded			Trailed			
Model	4,00 m	5,00 m	6,00 m	6,00 m	8,00 m	10,00 m	12,00 m
Power req. (hp)	120-160	150-200	180-240	180-240	240-320	300-400	360-480
Tines	4 rows of Vibrating 70x12 or 3D safety			5 rows of Vibrating 70x12 or 3D safety			
Number of tines	24	30	36	36	48	60	72
Weight (kg) with Cage roller	2 200	2 500	2 800	4 900	5 500	10 160	10 700



T. +33 (0) 2 51 14 14 40  
F. + 33 (0) 2 40 96 32 36

www.agrisem.com  
agrisem@agrisem.com



Your Dealer:



VIBROMULCH®



# VIBROMULCH®




VIBROMULCH® machine is an universal cultivator.

This machine offers two types of tines :

- 3D safety for the intensive soil work at 15cm
- 70x12 vibrating for light soil work

This machine participates in the structuring of the soil surface. It can be used along the year for the incorporation of residues or seedbed preparation. Today with the reduction of chemicals, the VIBROMULCH® brings a new alternative for weed management.

The sweep shares allows scalping the crop regrowth and destructions of weeds.

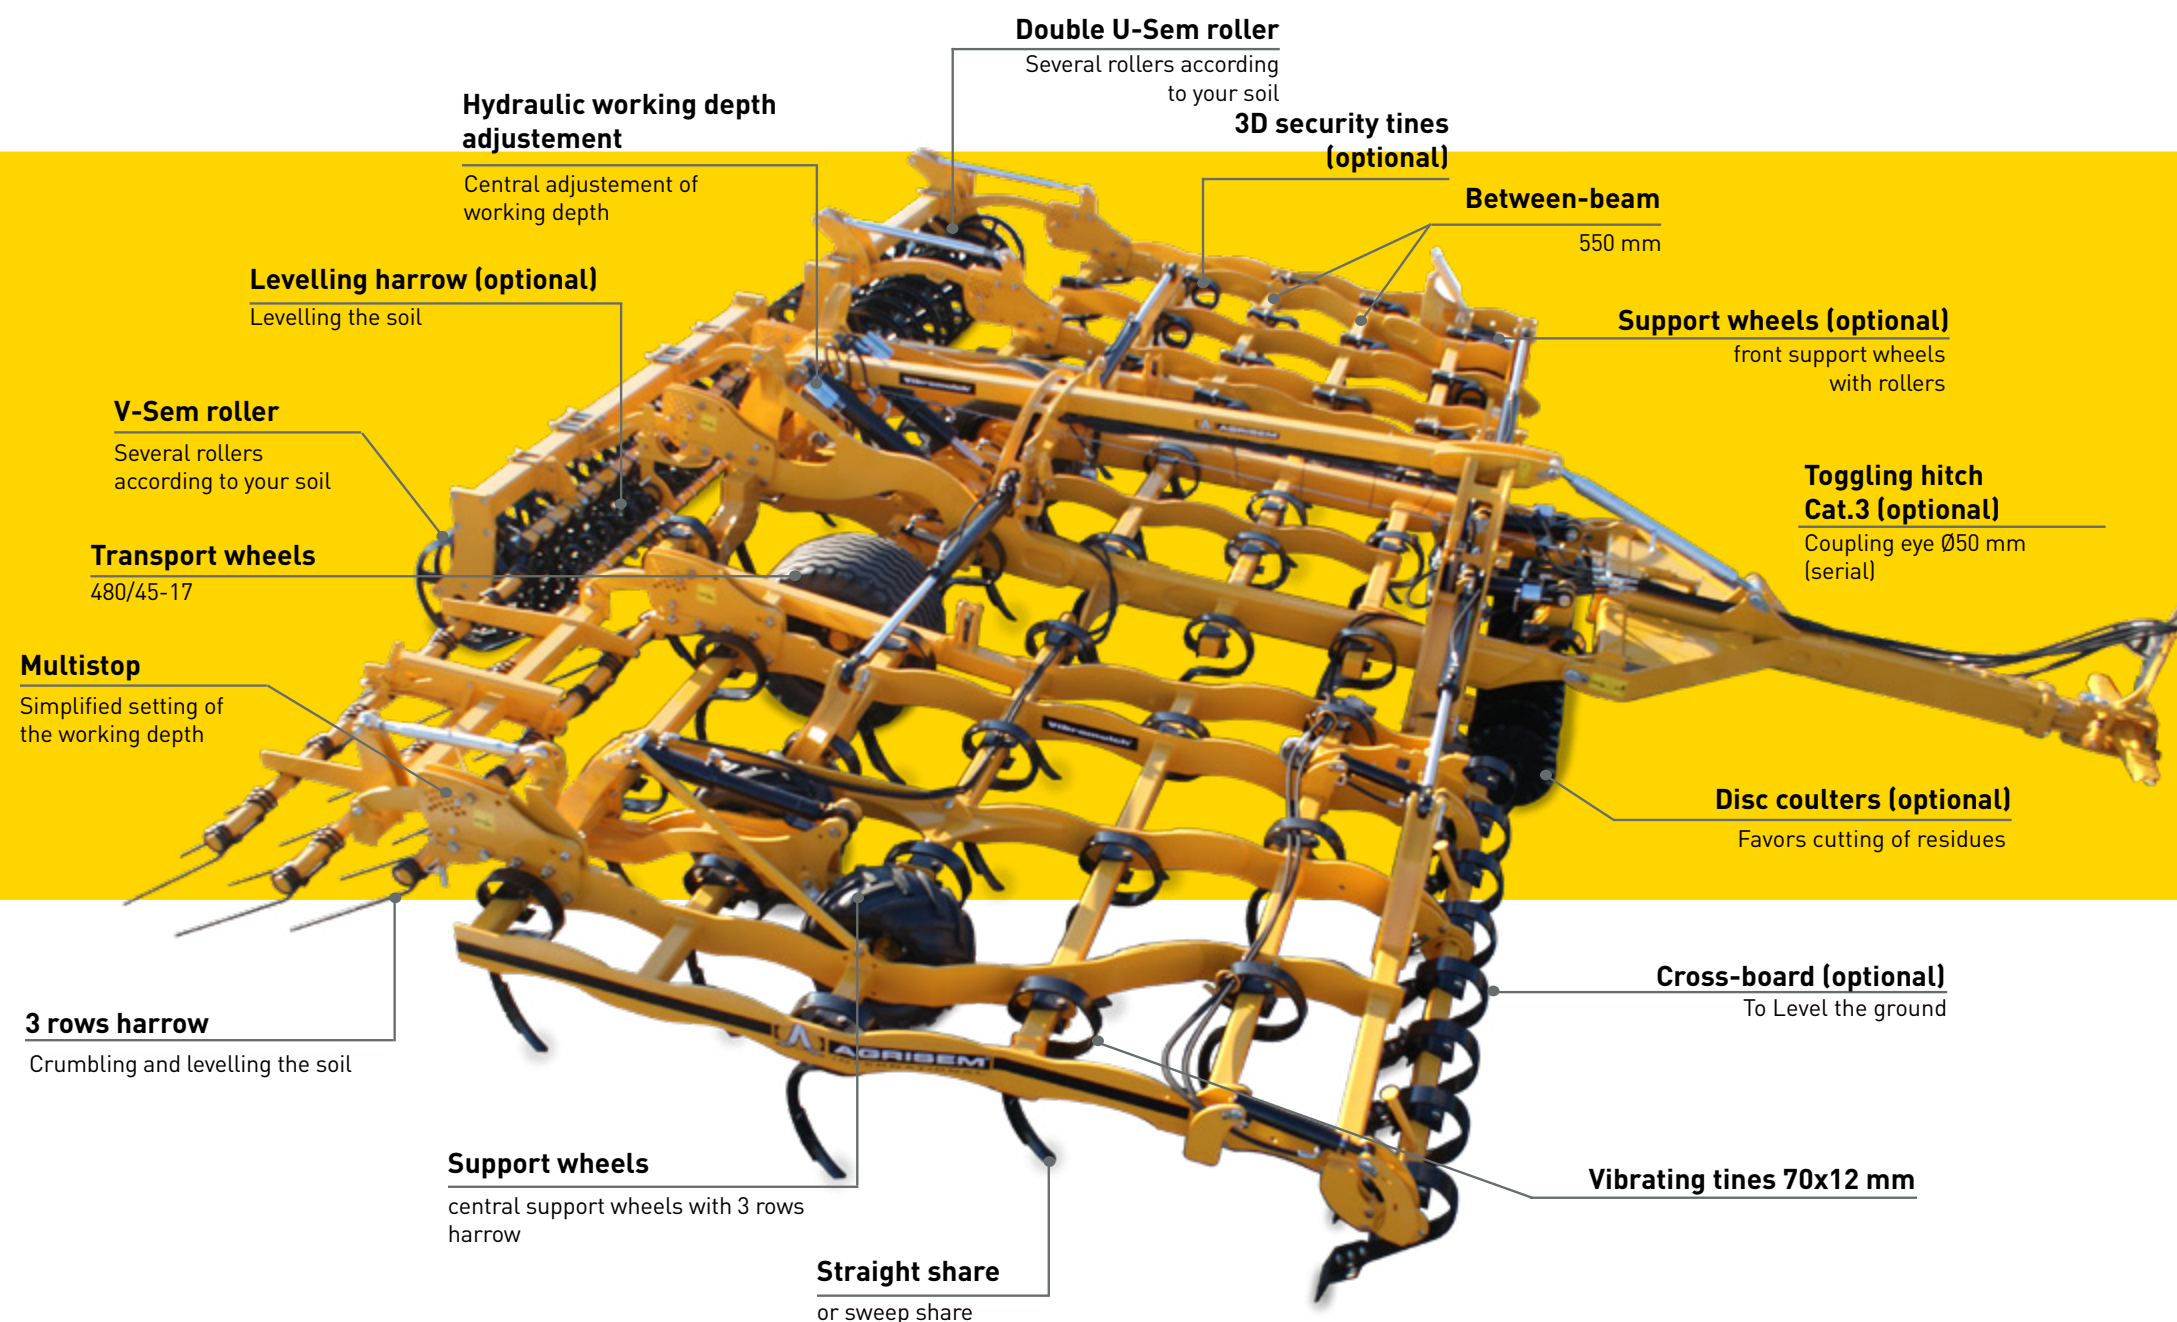

Vibromulch mounted 4 / 5 / 6 m



## Choose your type of tine



» An important penetration in all conditions  
» Intensive work for a good mixed of residues  
» Usable in first stubble break or after plowing

» Intensive and shallow cultivation  
» Heats and ventilates the soil surface  
» Usable in second stubble break or seed bed preparation


## Spaced layout of tines



4 rows of tines on mounted versions and 5 rows of tines on trailed versions

» Hight clearance under frame and between beam  
» Intensive brewing of the soil  
» Able to work the important crops


## Levelling harrow

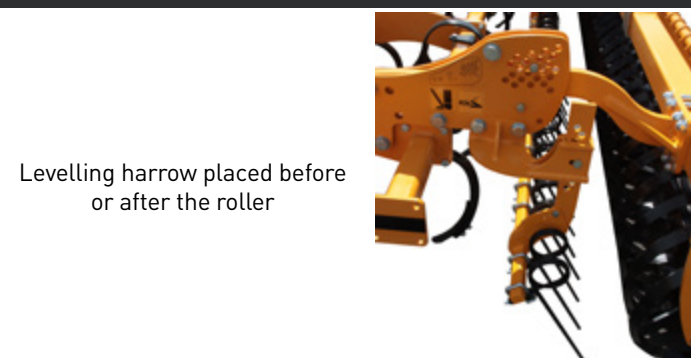

Levelling harrow placed before or after the roller

» For a perfect seedbed preparation  
» Good levelling  
» Ideal for maximum crumbling in heavy soil

## Choose your configuration

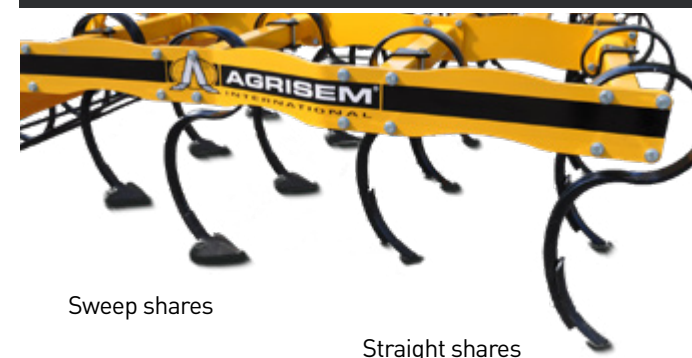


Sweep shares

Straight shares

» Enables an optimal work  
» Power saving and excellent crumbling  
» Scalps on the width with an important penetration

## Stability of the machine

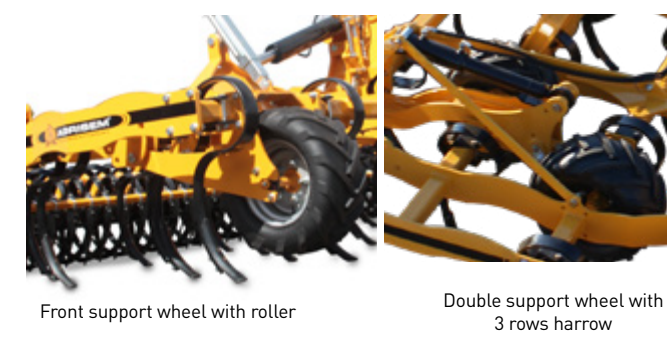


Front support wheel with roller

Double support wheel with 3 rows harrow

» Favors hight speed work in difficult condition  
» Ensure a precise working depth ajustement  
» Hydraulic control of double support wheel

## Exclusivity

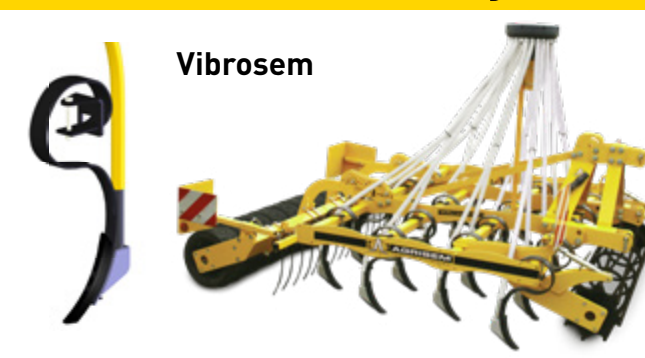

Vibrosem

» With a DSF front hopper, transform your stubble-breaker in a seeder (only for mounted version)