

# Range Specifications

## AGROMULCH® Silver mounted

	Rigid models		Folding models	
 Working width (≈ m)	3,00	3,50	4,00	5,00
 Transport width (≈ m)	3,00	3,50	3,00	3,00
 Weight in Shear-Bolt security with Cage roller Ø526 (≈ kg)	1 350	1 545	2 410	2 619
 Weight in Non-Stop security with Cage roller Ø526 (≈ kg)	1 772	2 073	2 992	3 306
 Power requirement (min-max) (hp)	100 - 140	120 - 160	160 - 200	180 - 240
 Number of tines	8	10	11	13
 Number of discs Ø460 single row	8	10	12	14

## AGROMULCH® Gold mounted

	Mounted rigid			Mounted folded	
Model	3,00 m	3,50 m	4,00 m	4,00	4,50 m
Power req. (HP)	140-180	160-200	170-220	180-240	220-280
Number of tines	10	12	13	13	17
Weight in Shear-Bolt security with Cage roller Ø526 (≈ kg)	2 130	2 300	2 620	3 150	3 600
Weight in Non-Stop security with Cage roller Ø526 (≈ kg)	2 350	2 515	2 790	3 400	4 020



**AGRISEM®**  
535 rue Pierre Levasseur - CS 60263  
44158 ANCENIS - FRANCE

T. +33 (0) 2 51 14 14 40  
F. + 33 (0) 2 40 96 32 36

[www.agrisem.com](http://www.agrisem.com)  
[agrisem@agrisem.com](mailto:agrisem@agrisem.com)



Your Dealer:



**AGROMULCH®** mounted



# AGROMULCH® mounted




The AGROMULCH® has developed for the hard cultivating with non-stop spring security.

The working depth is to 5 to 25 cm. It is possible to mulch the surface residues with 335 mm wing ploughshare but also without winged ploughshare up to 25 cm deep for pseudo-ploughing in healthy conditions.



This machine ensures a very intensive soil work «structure and unpack».

AGROMULCH® can be used along the year to scalping the crop regrowth or for pseudo-ploughing in healthy conditions.


## AGROMULCH® Silver mounted

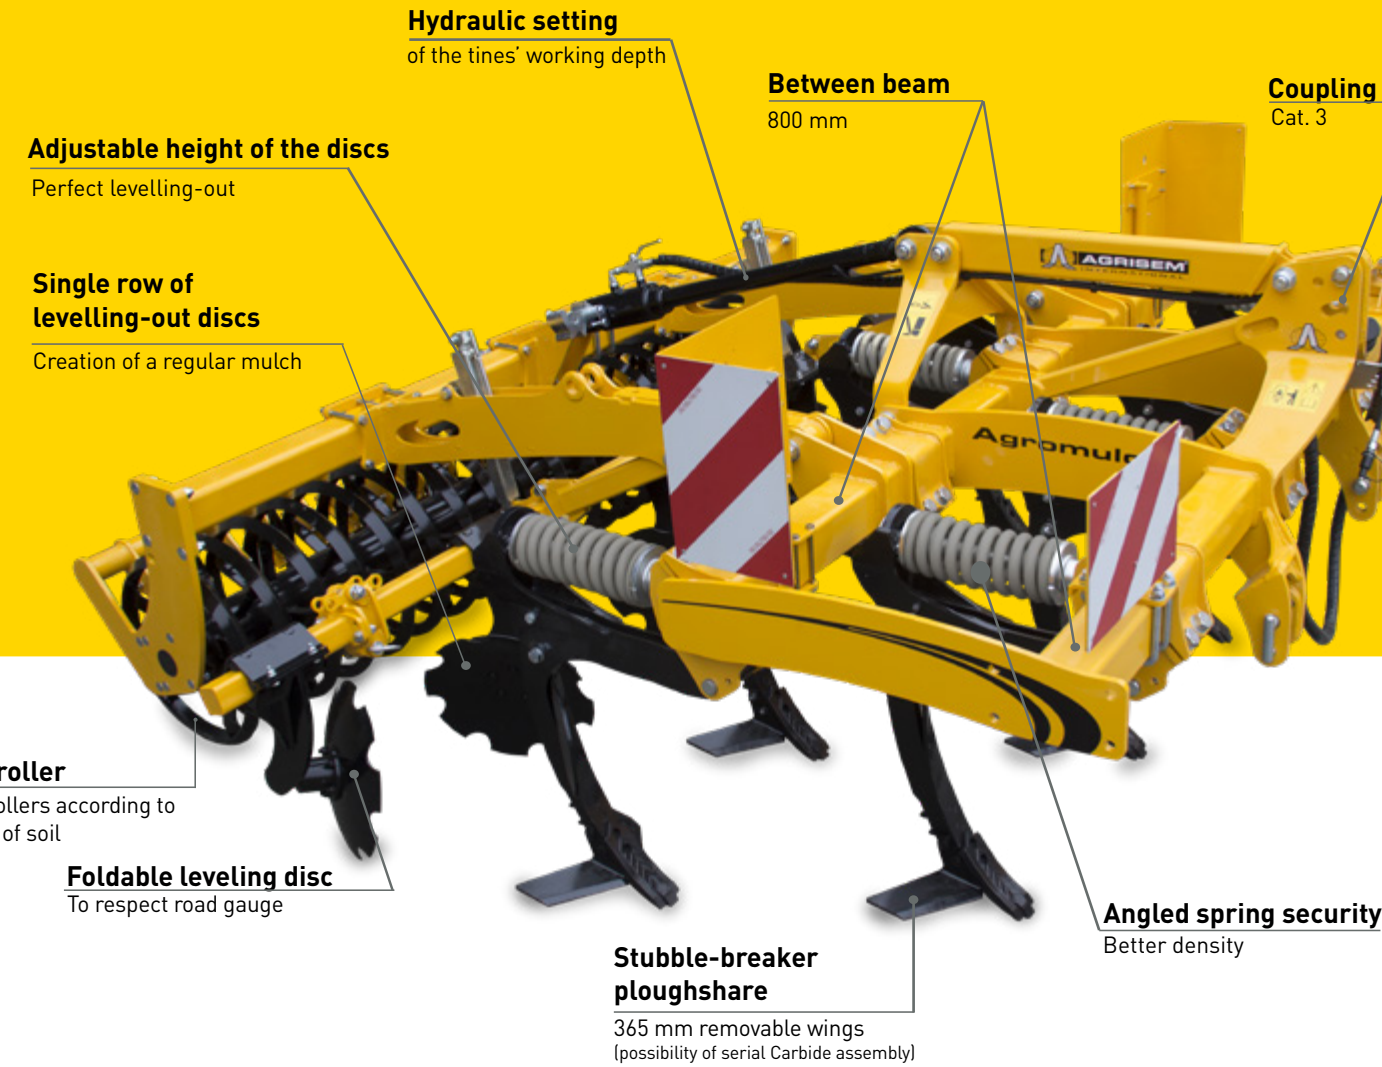

## AGROMULCH® Gold mounted

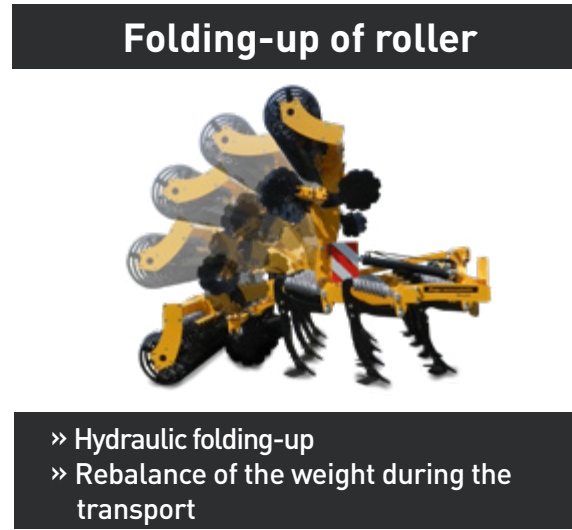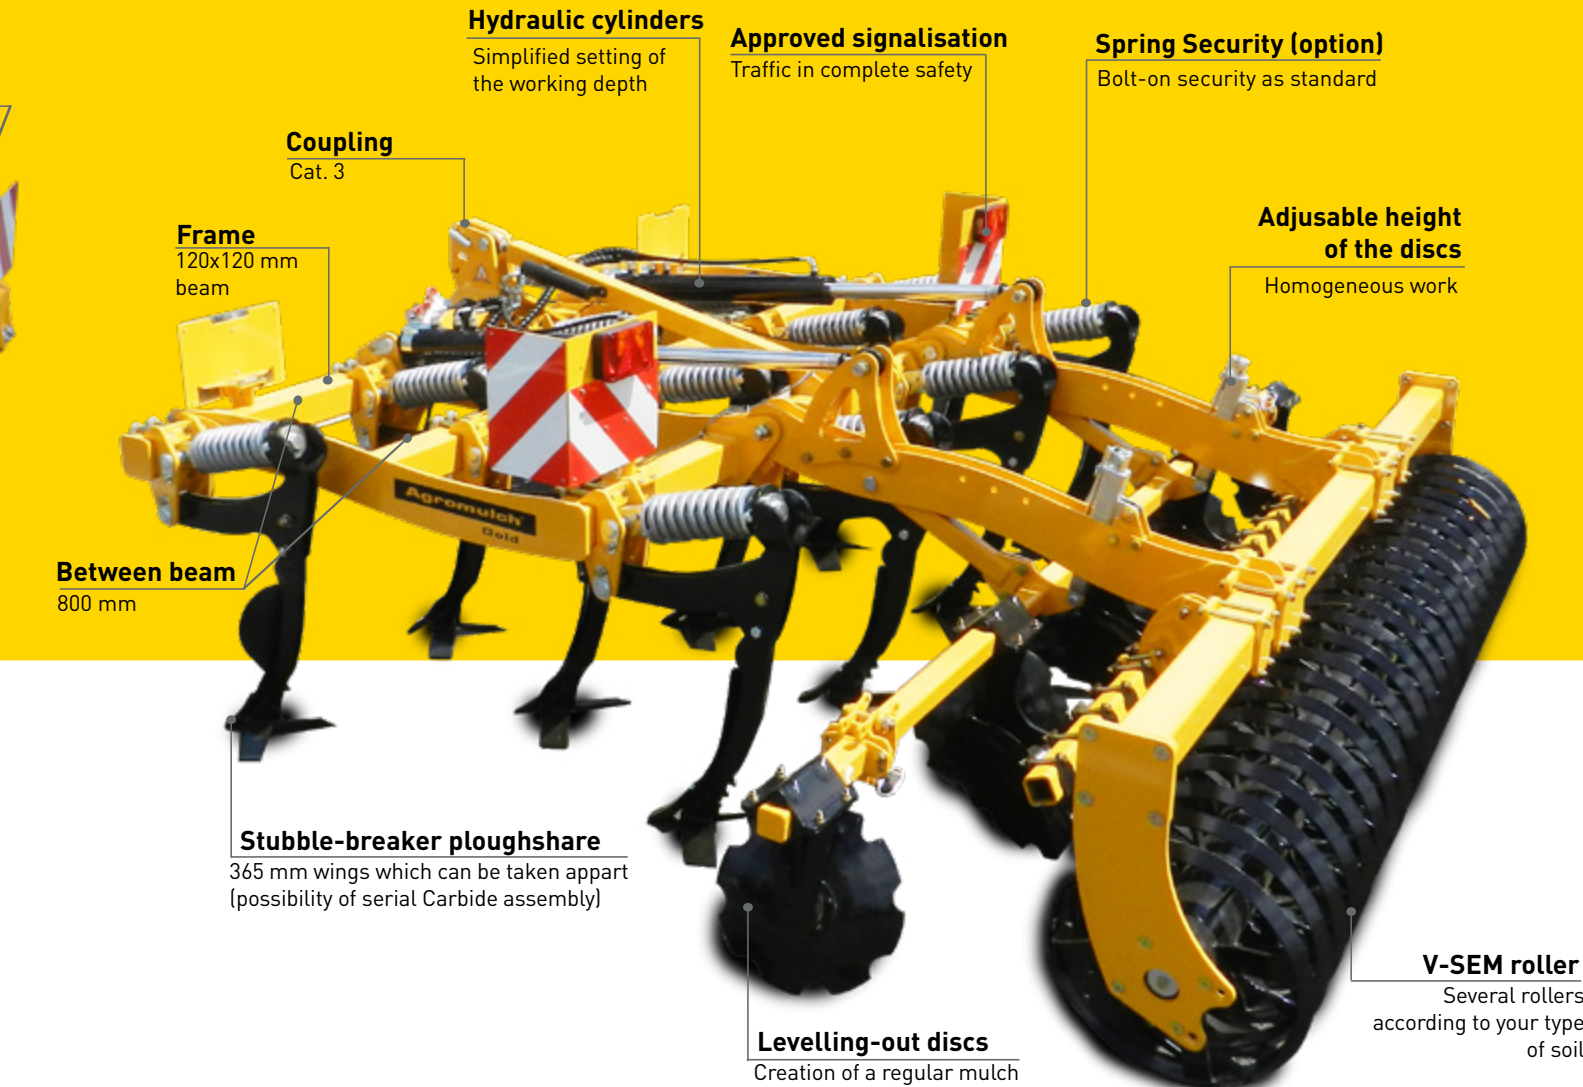

## Spring security

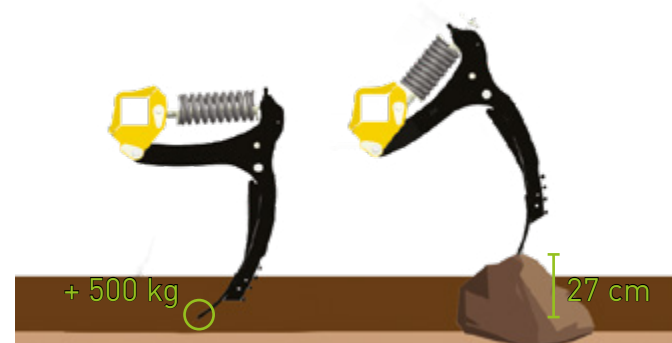

- » Release at the tip: +500 kg of pressure
- » Important clearance for the release
- » Non-stop spring security

## Criss-crossing of the wings



- » Superficial stubble-breaker after harvest
- » Destruction of the crops

## Homogeneous work




- » Intensive mixing of the crops
- » Creation of a regular mulch
- » Perfect levelling-out

## Levelling-out



- » Irreproachable surface
- » Improved soil structure
- » Facilitated gestion of the crops

## Working depth

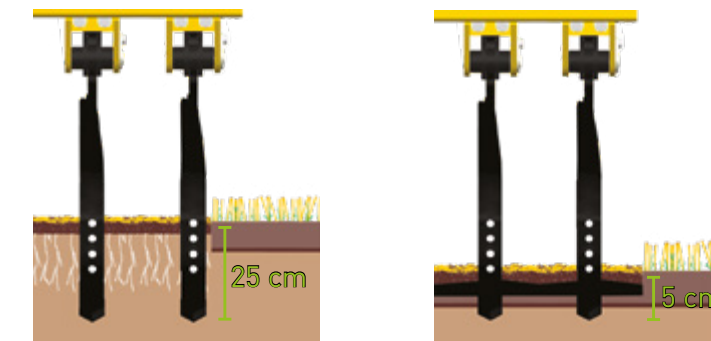

- » Without the wings: work at 25cm deep
- » With the wings: work at 5 to 15cm deep

## Exclusivity

Retracted point blade  
**PATENTED**

By replacing the tines by blades, it becomes a soil loosener



- » 1 machine for 2 functions
- » Use all year long
- » Easy to replace