

Range Specifications

	Version (meter)	Silver	Gold	Platinum BC	Platinum SR
Frame		ø160 mm	ø200 mm	ø200 mm	ø120x200 mm
Attelage		CAT.2	CAT.3	CAT.3	CAT.3
Power (ch)		80-140	90-210	100-265	
Charge admissible à 80cm		1 500 kg	2 500 kg	3 000 kg	3 000 kg
Compacité maxi (cm)		37,5	29	35	70
Blades		TCS 650	TCS 650	TCS 650	TCS 740
Number of blades	3,00m	4	4	4	4
	3,50m	-	6	6	6
	4,00m	-	6	6	6
Rollers		Cage, Combimulch	-	Cage, Combimulch, Steel-Pack	-
Poids selon version	3,00m rigid	520	680	780	1 350
	3,50m rigid	-	840	-	1 830
	4,00m rigid	-	870	-	-
	3,50m manual retractable	-	-	970	-
	4,00m manual retractable	-	-	970	-
	3,50m & 4,00m hydraulique retractable	-	-	1 010	1 895



AGRISEM®
535 rue Pierre Levasseur - CS 60263
44158 ANCENIS - FRANCE

T. +33 (0) 2 51 14 14 40
F. + 33 (0) 2 40 96 32 36

www.agrisem.com
agrisem@agrisem.com



Your Dealer:



COMBIPILOW®

COMBIFLOW®



The COMBIFLOW® machine is the combinable soil loosener.

It has been made to go between the tractor and an other machine.

This machine allows to do two operations in one pass.
The COMBIFLOW® machine loosens by keeping the fertility of the soil because horizons are not mixed.

The machine is mounted with shifted tip blade.

This technologie patented by AGRISEM ensures optimal loosening across the width.

COMBIFLOW® Silver

Frame
160x160 mm



COMBIFLOW® Gold

Frame
160x160 mm





COMBIFLOW® Platinum

Frame
200x200 mm




COMBIFLOW® Platinum SR Version

Frame
200x200 mm

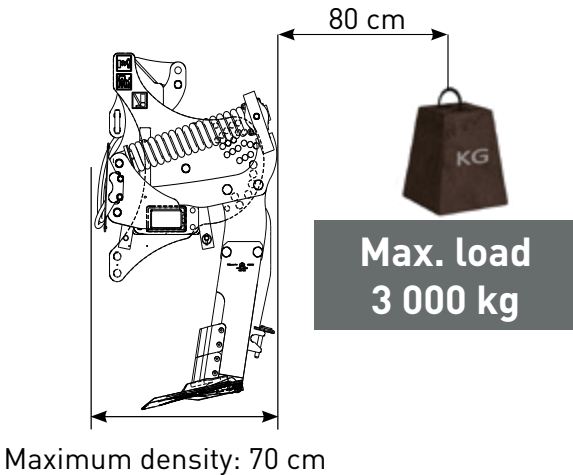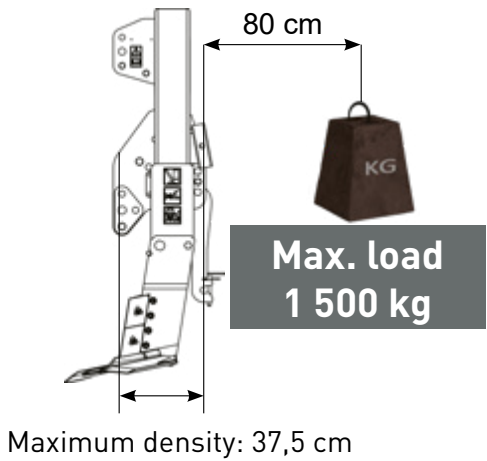

Agronomy

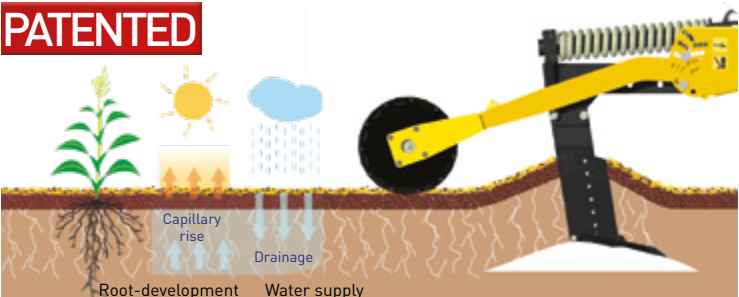

- » No disturbance of horizons
- » Vertical cracking by the creation of a wave
- » Facilitates crop growing and capillary rises

Saving




- » Reduction of the length of time of the intervention
- » Control of the setting-up loads
- » Fissuring and crop-growing at the same time

Bridge framework



- » Clearance at work
- » Large PTO passage
- » Frame density

Economy

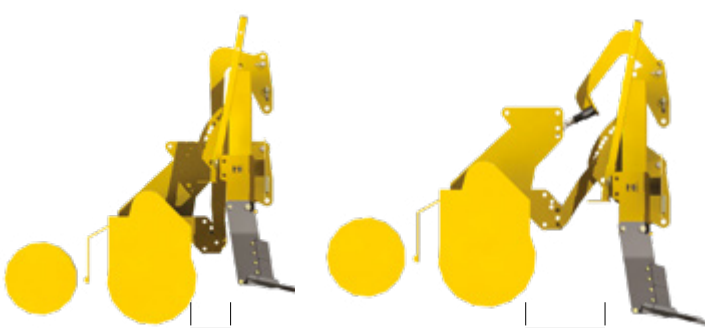


- » Transport density
- » Coupling safe

Technology



- » Wearing parts easy to change
- » Tungsten carbide protection available on every parts

Performance

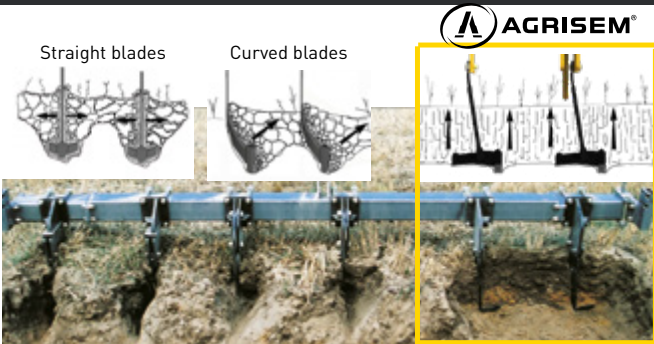

- » Homogeneous soil loosening on the entire width
- » Without «blockage effect»
- » Without creation of clods